


NISE 50C Quick Reference Guide

Ver B. (P/N: 60177B0295X00)

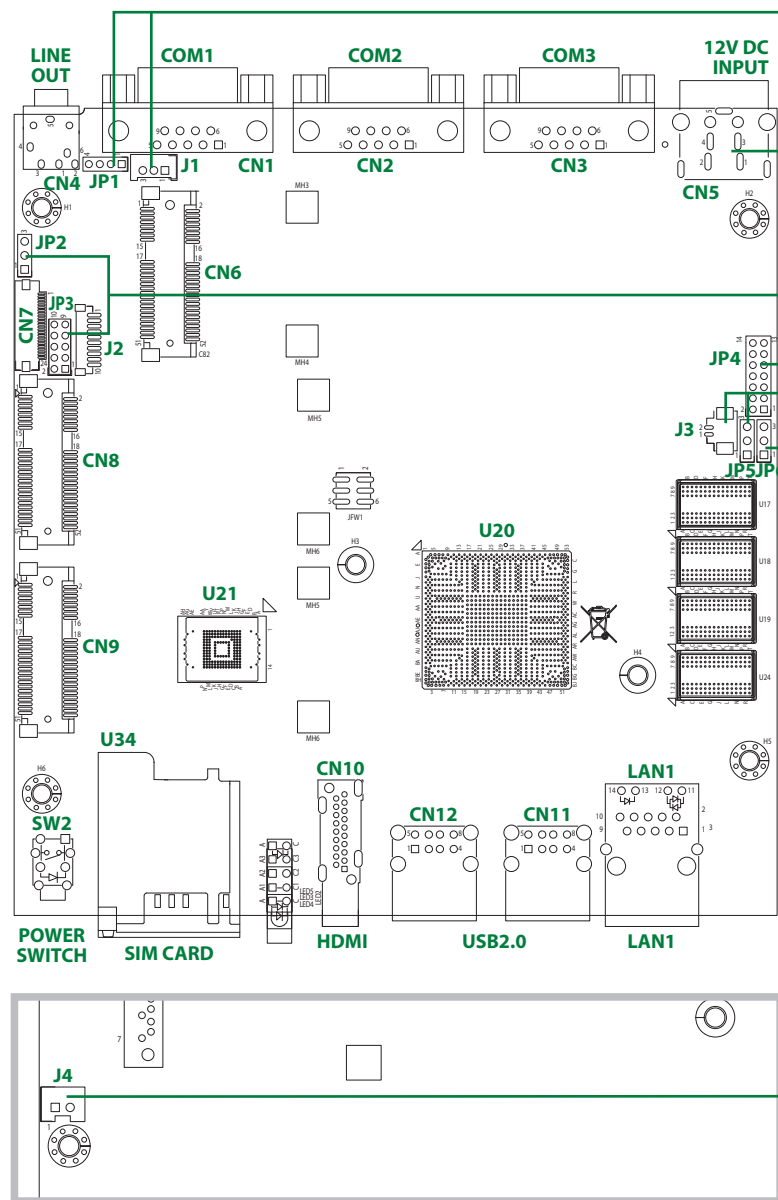

JP1: MIC-In Pin Header


Pin	Definition
1	MIC1_L3
2	MIC_JD
3	MIC_JD
4	MIC1_R3

J1: Com4 Pin Header

Pin	Definition
1	GND
2	SP4_RXD_R
3	SP4_TXD_R

CN5: Power Connector

Pin	Definition
1	DC+
2	DC+
3	DC-
4	DC-
5	GND

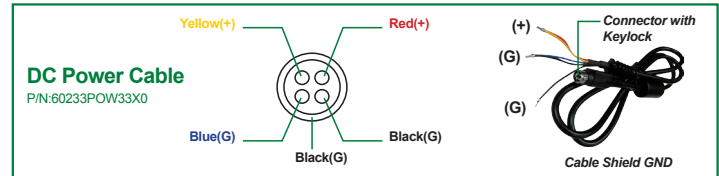

JP3: GPIO Pin Header

Pin	Definition	Pin	Definition
1	VCC5	2	GND
3	ICH_GPO0_OUT	4	ICH_GPI0_IN
5	ICH_GPO1_OUT	6	ICH_GPI1_IN
7	ICH_GPO2_OUT	8	ICH_GPI2_IN
9	ICH_GPO3_OUT	10	ICH_GPI3_IN

JP2: AT/ATX Mode Select

Pin	Definition	Pin	Status	Function Description
1	3VSB			
2	AT_ATX_SELECT	1-2 (*)	Short	ATX Mode
3	GND	2-3	Short	AT Mode

JP4: Front Panel Pin Header

Pin	Definition	Pin	Definition	Pin	Definition
1	GND	2	VCC3	3	SATA_LED#
4	VCC3	5	I2C_C	6	I2C_D
7	3VSB	8	GND	9	SLP_S3#
10	PS_ON#	11	EC_PWRBT#	12	GND
13	PM_RESET#_J	14	GND		

J3: Battery Connector

Pin	Definition
1	GND
2	VBAT_L

JP5: ME Clear Pin Header

Pin	Definition	Pin	Status	Function Description
1	NC			
2	SRTC_TEST#	1-2 (*)	Short	Normal
3	GND	2-3	Short	Clear BIOS Setting

JP6: CMOS Clear Pin Header

Pin	Status	Pin	Status	Function Description
1	NC			
2	RTC_TEST#	1-2 (*)	Short	Normal
3	GND	2-3	Short	Clear BIOS Setting

J4: SATA Power Connector (For HDD / SSD Version)

Pin	Definition
1	VCC5
2	GND

Quick reference guide is subject to change without prior notice. For any update, please visit our website: www.nexcom.com

□ = Pin1 [*] = Default setting