


NISE 301 Quick Reference Guide

Ver A. (P/N: 60177A0361X00)

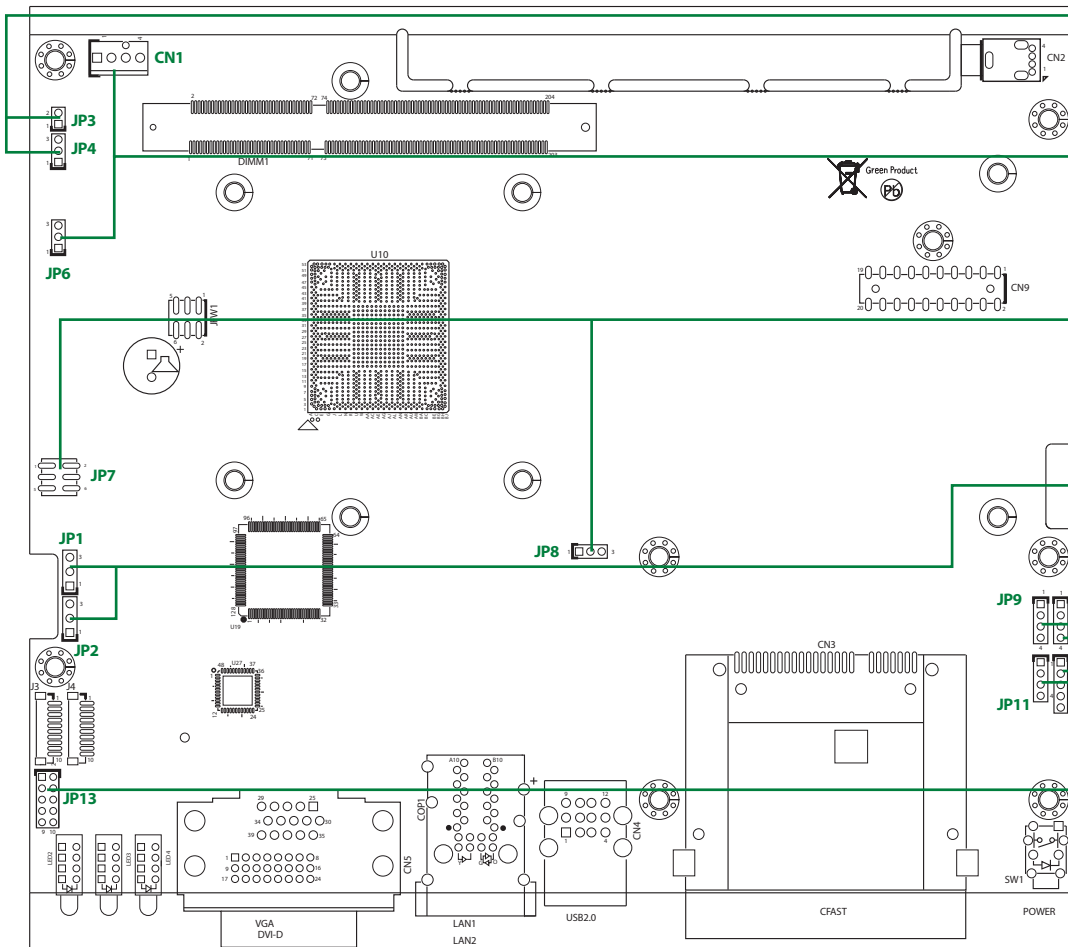

JP4: AT/ATX POWER TYPE SELECT

Pin	Definition
*1-2	AT MODE
2-3	ATX MODE

JP3: SYSTEM RESET

Pin	Definition
1	Reset
3	GND

JP6: SMBUS

Pin	Definition
1	SMB_CLK
2 ON	SMB_DATA
2 ON	GND

CN1: SYSTEM FAN CONNECTOR

Pin	Definition	Pin	Definition
1	GND	2	12V
3	FAN IN	4	FAN OUT

JP7: RING (For COM PORT 1)

Pin	Definition
*1-2	RI
3-4	5V
5-6	12V

JP8: GSM/DONGLE SWITCH SELECT

Pin	Definition
1	3VSB_MINI2
*2	USB_SEL
*3	GND

JP1: RTC CLEAR SELECT

Pin	Definition
*1-2	Normal
2-3	RTC Clear

JP2: RTC CLEAR SELECT

Pin	Definition
*1-2	Normal
2-3	RTC Clear

JP9: LINE IN

Pin	Definition
1	LIN_L3
2	GND
3	LIN_JD
4	LIN_R3

JP10: MIC IN

Pin	Definition
1	MIC1_L
2	GND
3	MIC1_JD
4	MIC1_R

JP11: LINE OUT

Pin	Definition
1	LOUT_L
2	GND
3	LOUT_JD
4	LOUT_R

JP12: SPEAK OUT

Pin	Definition
1	FRONT_L+
2	FRONT_L-
3	GND
4	FRONT_R+
5	FRONT_R-

JP13: GPIO

Pin	Description	Pin	Description
1	VCC5	2	GND
3	ICH_GPO0_OUT	4	ICH_GPIO_IN
5	ICH_GPO1_OUT	6	ICH_GPI1_IN
7	ICH_GPO2_OUT	8	ICH_GPI2_IN
9	ICH_GPO3_OUT	10	ICH_GPI3_IN

J6: SATA POWER CON

Pin	Definition
1	12V
2	GND
3	GND
4	VCC5

Quick reference guide is subject to change without prior notice. For any update, please visit our website: www.nexcom.com

□=Pin1 [*]=Default setting