


# NISE 70 Quick Reference Guide

Ver B. (P/N: TBC)

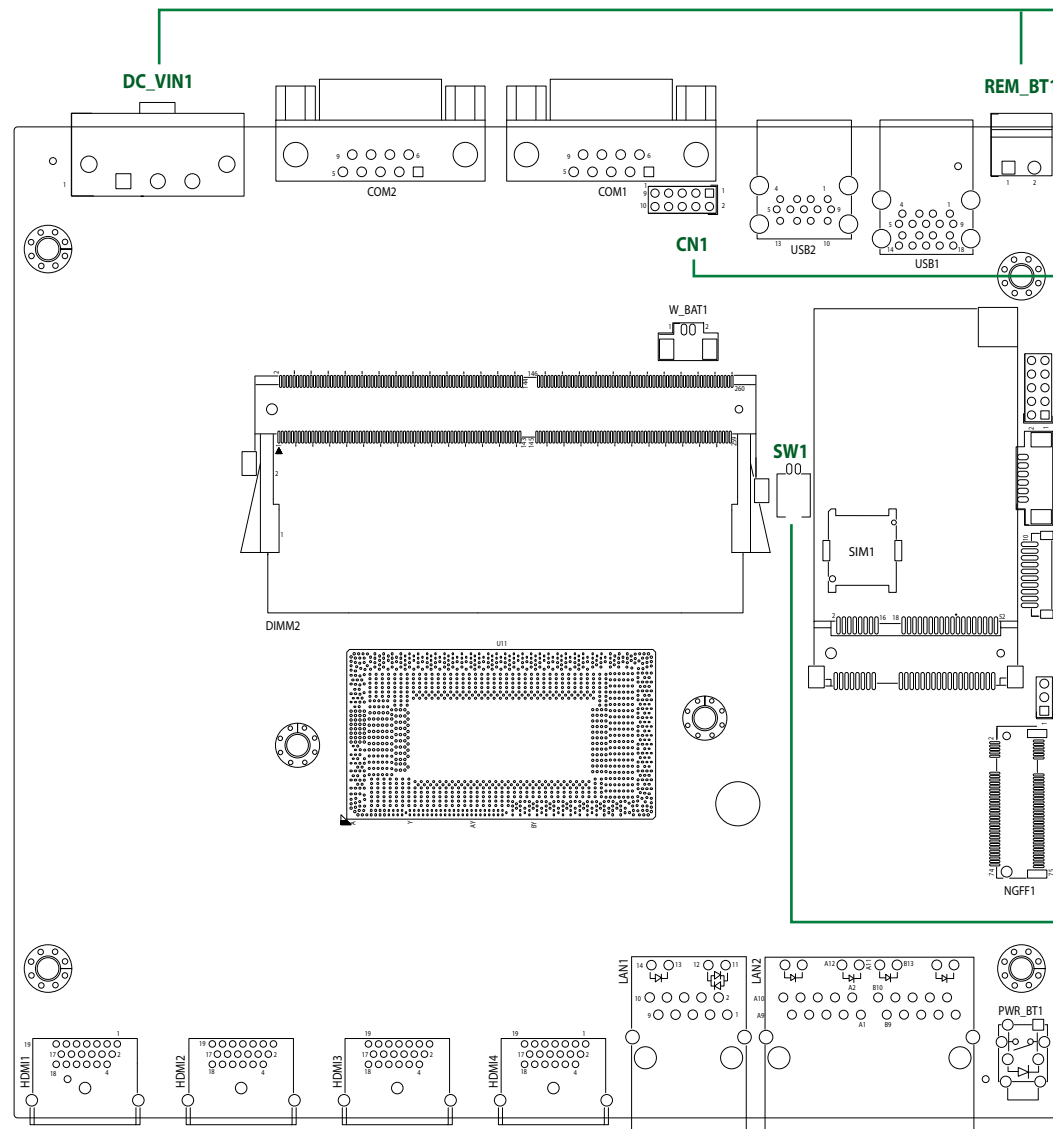

**DC\_VIN1: Power Input Connector (VIN: +12~24V ±5%) Connector**

	Pin	Signal
	1	VIN
	2	GND
3	GND_EARTH	

**REM\_BT1: Remote Power Button Connector**

	Pin	Signal
	1	GND
2	REM_BT#	

**CN1: System Internal Function Connector**

	Pin	Description	Pin	Description
	1	+5VSB	2	GND
	3	USB2_N	4	USB2_P
	5	UART_RX	6	UART_TX
	7	I2C_SCL	8	I2C_SDA
	9	GPO_3	10	+5VSB

**GPIO1: GPIO Connector**

	Pin	Description	Pin	Description
	1	+5V	2	GND
	3	GPO_0	4	GPI_0
	5	GPO_1	6	GPI_1
	7	GPO_2	8	GPI_2
	9	GPO_3	10	GPI_3

**FAN1: FAN Connector**

	Pin	Signal
	1	GND
	2	+5V
	3	TACH_FAN1
	4	PWM_FAN1
	5	+5VSB
6	GND	

**ESPI\_DB1: Debug Connector**

	Pin	Signal
	1	GND
	2	PLTRST#
	3	eSPI_CLK
	4	eSPI_CS#
	5	eSPI_IO3
	6	eSPI_IO2
	7	eSPI_IO1
	8	eSPI_IO0
	9	eSPI_RESET#
10	+3VSB	

**SW1: Clear CMOS Switch**

	Pin	Signal
	1	Clear CMOS
2	Reset CSME	

**JPWR\_MODE1: ATX/AT Mode Selection**

	Pin	Signal
	1-2	ATX MODE
2-3	AT MODE	

