



# NISE50-E3845 Quick Reference Guide

Ver A. (P/N: 60177A0599X00)

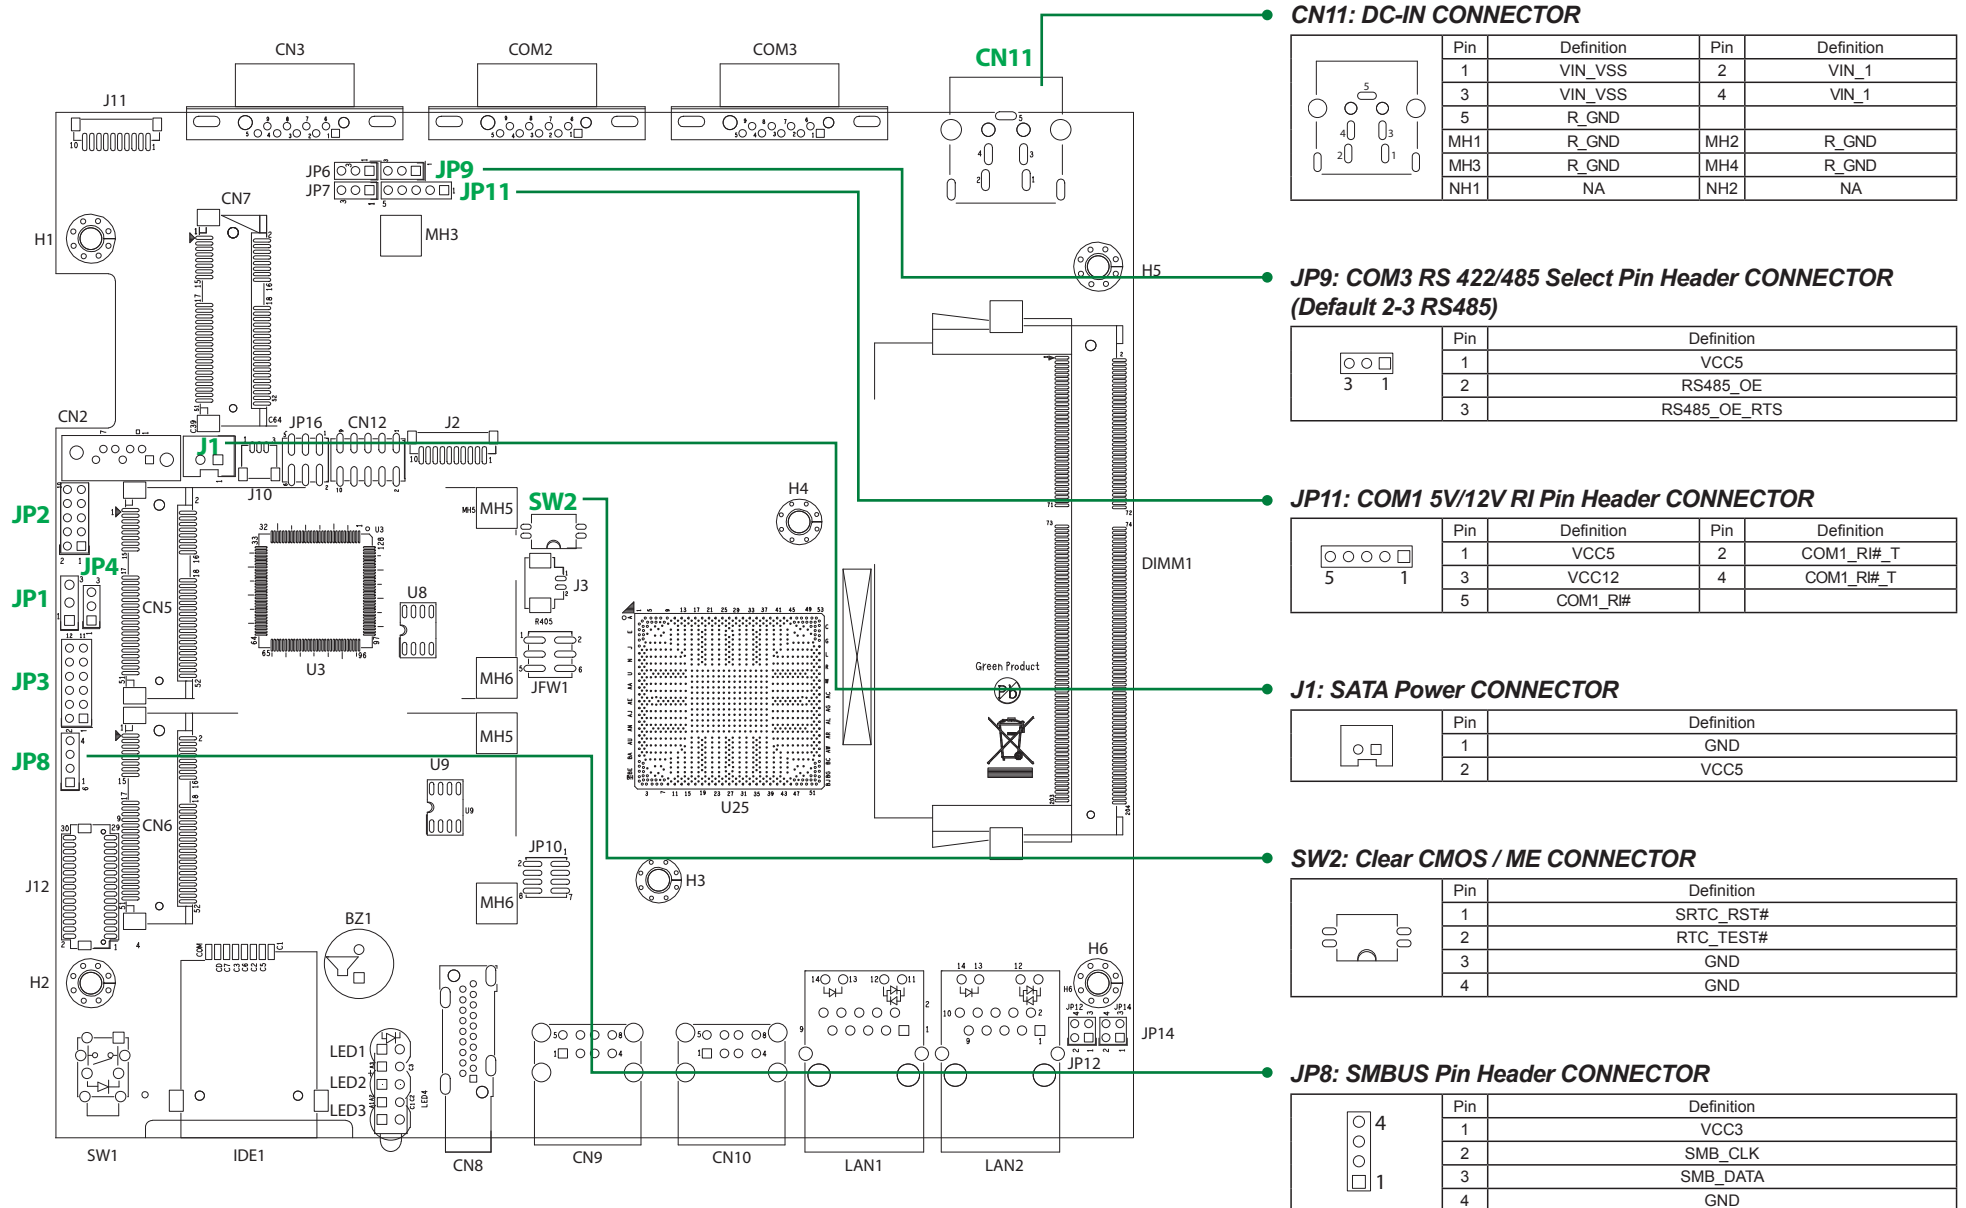

# NISE50-E3845 Quick Reference Guide

Ver A. (P/N: 60177A0599X00)

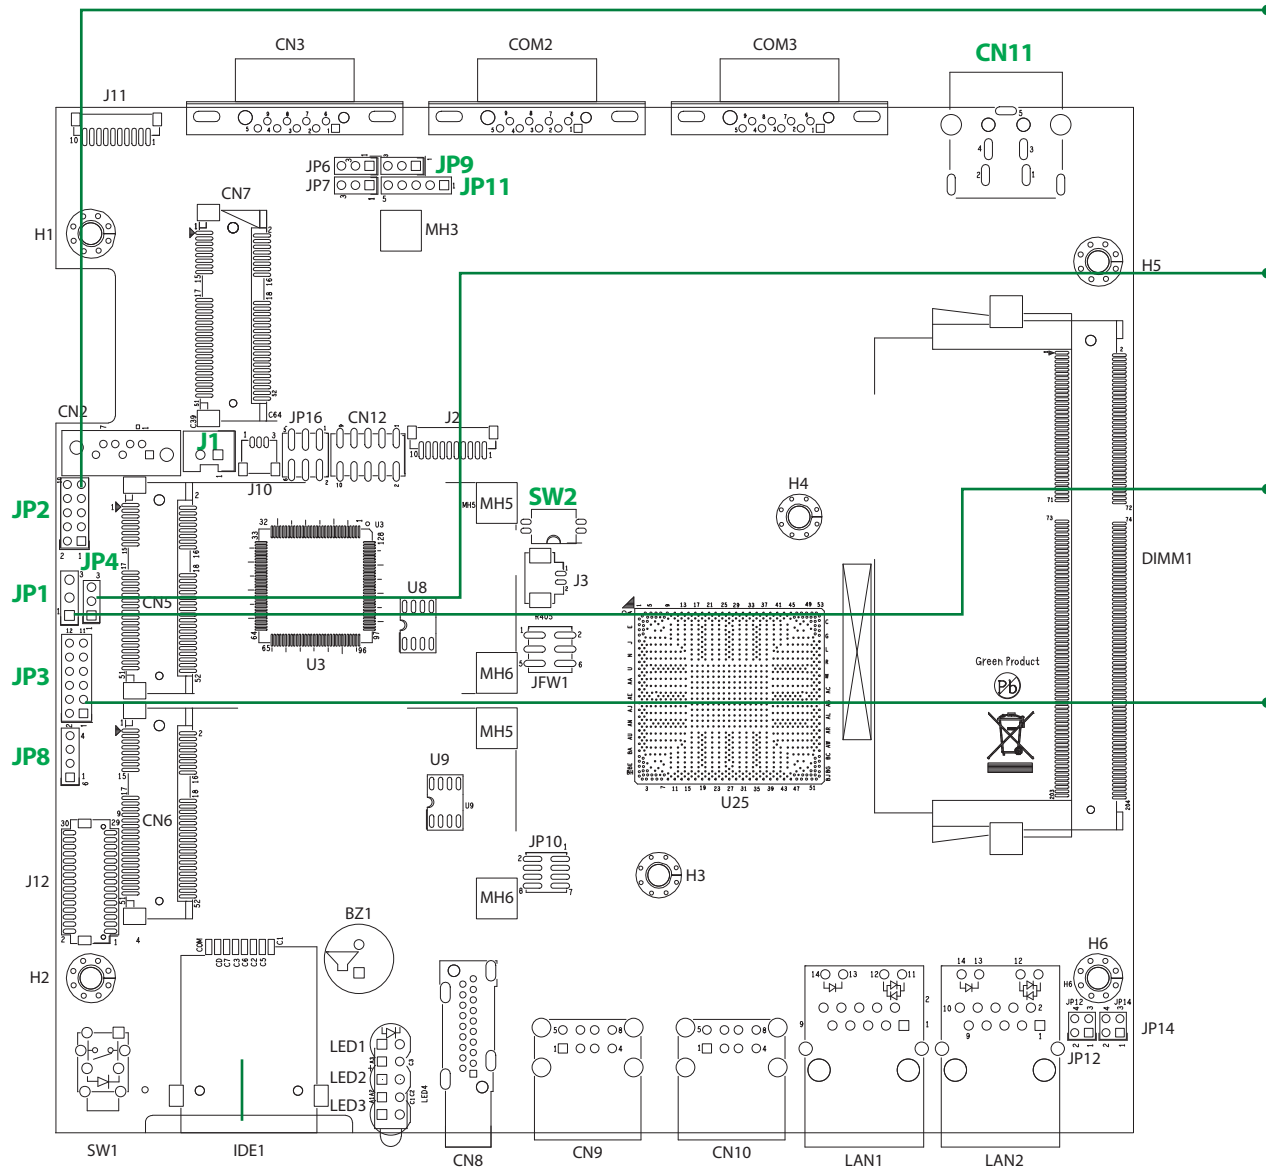

**JP2: GPIO Pin Header**

	Pin	Definition	Pin	Definition
	1	VCC5	2	GND
	3	ICH_GPO0_OUT	4	ICH_GPIO_IN
	5	ICH_GPO1_OUT	6	ICH_GPIO_IN
	7	ICH_GPO2_OUT	8	ICH_GPIO_IN
	9	ICH_GPO3_OUT	10	ICH_GPIO_IN

**JP4: SIM Card Power Select CONNECTOR (1-2 CN5 , 2-3 CN6)**

	Pin	Definition
	1	UIM_PWR1
	2	UIM_PWR
	3	UIM_PWR2

**JP1: AT/ATX Mode Select CONNECTOR (1-2 ATX , 2-3 AT)**

	Pin	Definition
	1	3VSB
	2	AT_ATX_SELECT
	3	GND

**JP3: Power & HDD LEDs/Power & Reset Switches CONNECTOR**

	Pin	Definition	Pin	Definition
	1	PWR_LED_N	2	VCC5
	3	SATA_LED#	4	VCC5
	5	3VSB	6	GND
	7	SLP_S3#	8	PS_ON#
	9	EC_PWRBT#	10	GND
	11	PM_RESET#_J	12	GND

Quick reference guide is subject to change without prior notice. For any update, please visit our website: [www.nexcom.com](http://www.nexcom.com)

=Pin1 [ \* ]=Default setting